
Abitibi River Forest Appendix 1: Form for Submission of Information on a Proposed Crossing

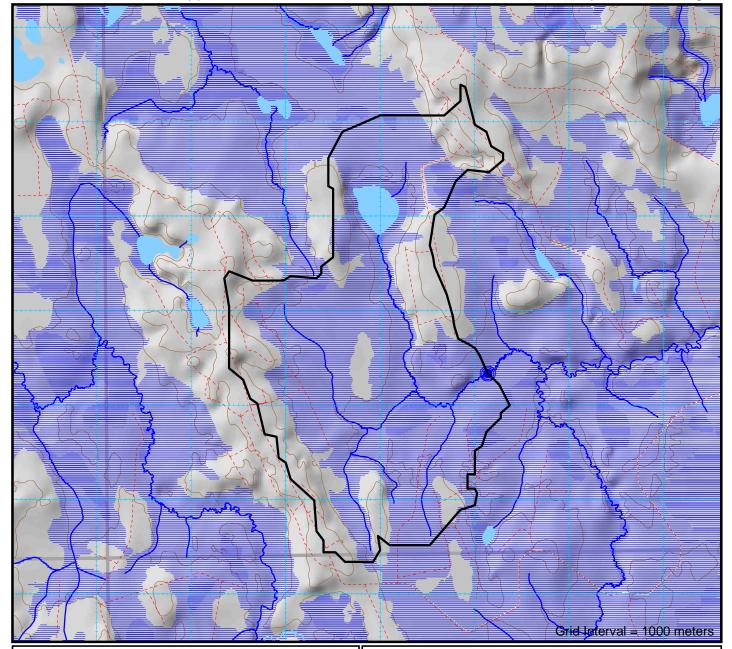

Watershed Characteristics

8.56 km² Watershed Area: 0.17 km² Lake Area: 0.51 km² Swamp Area: 0.68 km² Retention Area: 7.89 % Retention Factor: 6.20 Base Class: Watercourse Type: Permanent

Crossing Location Characteristics

Evaluation ID No.: A3309 Geographic Township: Tomlinson

UTM Coordinates (NAD83): 571142E, 5465333N

Road Type

Stream Gradient: 0% Slope > 30% (17°): NO

Installer Experience : As Per Approved Implementation Toolkit



Proposed Structures					
	Structure 1	Structure 2	Structure 3		
Structure Typ	e Ice	Portable Bridge			
Design Flo	V Q2	Q25			
Fill Materi	Snow and Ice	Pit Run Gravel			
Dates for In Sta Water Work	t	July 16			
(if required) Finis	h	August 31			
Removal Timefram	By March 31st	<7 Years			

Calculations performed by First Resource Management Group (FRMG). Neither Abtitibi River Forest Management Inc., nor FRMG guaratee the accuracy of any information presented on this form. Coordinates and map are UTM projection, Zone 17 NAD83 datum

Shaded Area for	ARFMI Road	300	Previously Used	Crossing Evaluation	V33U0
Office Use Only	Network No.	300	Crossing ID	Reference Number	AJJU7

Publication Date: December 19, 2023	Road Network Name:
-------------------------------------	--------------------

Abitibi River Forest - S.F.L. # 551832	Fisheries Operational Management Zone (OMZ):		
Proponent: 3 Nations Logging LP	Standard for Self-assessed Water Crossing Construction, Removal and/or		
c/o P.O. Box 867	Decommissioning: Conditions of standard not met for first structure. See red text.		

New Liskeard, Ontario Previous Assessment Year (incl. SA): 2024 P0J 1P0 SAR species likely to be impacted: NO (705) 680-0033 NO Preconstruction photos available:

Plan Term: 2022-2032 YES Within 500m of Brook Trout stream: AWS Year: 2024-25

Culvert I	Culvert Design Options Q ₂₅		Q ₁₀	Q_5	Q _{2.33}	
	Design Flow	4.832 m³/sec	4.059 m³/sec	3.383 m³/sec	2.609 m ³ /sec	
	1 Round	1800mm	1800mm	1600mm	1500mm	
	2 Round 1400mm 1400mm 1200mm 1200mm		1200mm			
	3 Round	1200mm	1200mm	1200mm	1000mm	
	1 Arch (BxD)	3xD) 2240x1630mm MP 2130x1400mm 2130x1400mm 1880x1260mm		1880x1260mm		
	2 Arch (BxD) 1880x1260mm 1630x1120mm 1630x1120mm 1630x1120mm		1630x1120mm			
	3 Arch (BxD) 1630x1120mm 1390x970mm 1390x970mm 1390x970mm		1390x970mm			
	Required Opening for bridges is calculated as per the Crown Land Bridge Management Guidelines.					

Conditions on Culvert Design Options

- · Initial Fisheries Review based on one pipe. Two or more pipes requires a re-assessment.
- Round culvert calculations assume 10% fill. For 20% fill, increase diameter to next highest standard diameter.
- For 40% fill, use a round culvert diameter of the Base distance of the corresponding Arch style culvert

General Standards

- No watercourse realignment, nor use of explosives is permitted.
 Minimize loss or disturbance to riparian vegetation. Restrict removal of riparian vegetation to the disturbance footprint required for construction, maintenance and decommissioning of the water crossing.
- Install erosion and sediment control measures prior to commencement of construction or decommissioning to prevent release of sediment or other deleterious substances into watercourse.
- Fill material placed below the normal high water mark must be erosion-resistant and/or protected from erosion. • Direct storm water runoff from bridge decks, side slopes, road approaches and ditches away from the watercourse
- and into a retention pond or vegetated area.

 Ensure erosion and siltation in ditch lines adjacent to the watercourse crossing approaches are controlled using sediment traps such as rock/soil dams or log jams as site conditions warrant.

 Do not block or impede the free passage of water and fish at any time of year up and down stream,
- with the exception of potential and temporary blockage due to water crossing construction/decommissioning activities. Abide by fisheries in-water timing windows in the approved FMP and/or forest management guides.
- Where fishery communities are not well documented, the most restrictive in-water timing window must be used. • Complete all in-water construction and decommissioning activities in an uninterrupted fashion and in an appropriate
- timeframe to minimize potential for site disturbance.

 If installation requires inwater work, do not locate within 100m of spawning or sensitive fish habitat eg. rapids, riffles, known overwintering areas.
- Maintain machinery free of fluid and fuel leaks. Wash, refuel and service machinery at least 30m from watercourse. Store fuel and other materials for machinery a minimum of 30m from the watercourse
- · Operate machinery on land with tracks/wheels above the normal high water mark, or on ice in a manner that avoids disturbance to the banks of the watercourse and adjacent riparian vegetation areas.
- Remove all debris from construction and decommissioning work from the site following completion of the undertaking.
- If machinery fording is required, limit to a one-time event (over and back) per piece of equipment essential to implementating the project, and only if using an existing crossing at another location is not available or practical.

 If minor rutting is likely, watercourse bank and bed protection methods (e.g., swamp mats, pads) are to
- be used provided they do not constrict flows or block fish passage;
- Grading of the watercourse banks for the approaches is not permitted;
- If the watercourse bed and banks are steep and highly erodible (e.g., dominated by organic materials and silts) and erosion or degradation is likely, use a temporary crossing structure or other practice to protect them;
- The one-time fording must adhere to the appropriate in-water timing windows; Fording must occur under low-flow conditions and not when flows are elevated due to local rain events or seasonal flooding.

- All calculations are for projecting ends. Total pipe length normally not to exceed 20m.
- All calculations assume a Headwater Depth of 1.0.
- MP = Multi-Plate (i.e. SPCSP)

Standards for Snow Fill and Ice Bridge Crossings

- Do not dredge, place fill on, grade or excavate the bed or banks of the watercourse.
- Do not use earth fill or aggregate below the normal high water mark. Crossings must
- be constructed of clean water, ice and snow free of dirt and debris · Snow fills and ice crossings must not restrict water flow within the watercourse where it
- occurs naturally during winter conditions, or otherwise completely obstruct fish passage · Do not locate within 100 metres of fisheries spawning or sensitive habitat.
- Appropriate seasonal conditions must be present (e.g., adequate depth of snow and ice, winter temperatures) to provide certainty that construction and removal standards can be satisfactorily implemented.
- No aggregate or loose woody material used to top the crossing.
 If logs or corduroy are used to stabilize the approaches:
 The logs must be clean;

- The logs may be bound together to facilitate removal and minimize site disturbance;
- No logs or woody debris are to be left within the watercourse;
- Corduroy (if used) adjacent to the watercourse banks must be removed and placed outside the floodplain to help prevent a damming effect on site. Corduroy that is frozen or embedded into the road approaches or watercourse banks must be left in place so as to not expose mineral soil adjacent to the watercourse. The remaining snow and ice can be left to melt in the spring. If required, remedial work will be carried out on the site after the crossing is removed to ensure that no logs or woody debris can wash back into the watercourse.
- Logs may be placed on road approaches to assist in diverting runoff away from the watercourse; however, they must be placed outside of the floodplain and in such a manner as to ensure that they do wash back into the watercourse.
- Sanding of snow and ice crossings must be kept to a minimum and within the bounds of operational health and safety considerations.
- · Corduroy logs or brush mats must be installed on the approaches when conditions are
- soft in order to avoid disturbing the banks and crossing approaches. • If water is being pumped from a watercourse to reinforce the crossing, the intakes must be sized and adequately screened to prevent debris blockage and fish entrainment.

Self-assessed. Follow conditions of appropriate standard(s).

MNRF Appendix 2: Biologist Risk Evaluation

Concerns and Conditions on Construction

Watershed Thermal Code: CD




	Structure 1	Structure 2	Structure 3
Risk Evaluation:	LOW	LOW	
Site Inspection Required:	NO	NO	


A DUMINI DIAME
ABITIBI RIVER Forest Management Inc

DRFMI (rnssi	ng Installation I	Renort		Only certifie	ed inspectors are allowed to condu	ct Forest Operations Inspe	ctions for subm
TIBI RIVER Management Inc	ng marananan	(Must be com	ppleted for each crossing location)		* 'As Built' Culvert I	nstallation Measuren (meters)	nents
Shareholder:		Block ID:		· 	Installed Diameter :		
		Pood Name		CULVERT	Structure Length :		
contractor:		Road Name:	Road Name:		Road Width :		
TE CONDITIONS ENCOUNTER	RED			O	Depth of Cover:		
ossing Located By:		Date Measurements Taken:			Water Depth in Pipe :		
					Number of Culverts :		
Stream Measurements			Foundation Soil Description :		Spacing Between Pipes :		
(meters)		* * * * * * * * * * * * * * * * * * * *	Sand Muck				
Flood Plain Width : A		**	Silt Rubble		* 'As Ruilt' Bridge I	nstallation Measuren	ments
Bankful Width : B		A	Clay Gravel		•	(meters)	
Channel width : C	F E	¥	Channel Type:		Bridge length :	G	
Depth - 25% of Channel : D (1)	D (I)	† † † † † † † † † † † † † † † † † † †	Ephemeral Ephemeral		Clear Opening Width :	Н	
Depth - 50% of Channel : D (c)	Notes:		Intermittent		Freeboard (min 0.5m) :	I	
lepth - 75% of Channel : D (r)			Permanent	90	Flood Rise :	J	
Depth - Bankful Flow : E		ARFMI Notification Provided :	BRIDGE	Fill Height :	K		
Depth — Floodplain : F			(ARFMI Advised- 'Change to Operation' made)	•	Left Slope Length :	L	
Stream Velocity : m /sec			FRI Incorrect		Left Slope Rise :	M	
			Unmapped		Right Slope Length :	N	
					Right Slope Rise :	0	
NSTALLATION CONDITIONS					Crib Width :	P	
tallation Supervised By:		Date of installation:			Crib Height :	R	
ossing Permanency :Refer to Structure Removal Timeframe spe	cified in AWS 4 and 5		Exercise Description and Control (V)	Verifia	ation: I have confirmed that the final a	rossing condition	Water Cr Wa
Permanent Temporary Decomp	nissioned Date:		Erosion Prevention and Control (X): (Indicate applicable measures taken)		satisfies the mandatory water cro will not impede future transfer of	ssing standards and	lns
Note: Measurements (*) must be included for all structures which remain in place beyond date of inspection Scheduled Removal Date:		Stable slopes on s	stream banks and drainage ditch banks	Note	·		7 🔲 Co
octores which remain in place beyond dure of inspection	al Crossing Location on Stream Segment):	-	Course, clean rock to high water mark	Note:	u .		En
	al Crossing Location on Stream Segment):	Re-vegetate or seed	slopes (stream banks and ditch banks)				Cu Se
Bridge Record Form submitted (i.e. MNR /ARFMI)	N		Divert drainage ditches to green belt				No
New Crossing Type: Structure Description		_	Line drainage ditches with rock				No
Box Culvert Steel	Sand	Use rock weirs in	drainage ditches to impede water flow				No Ad
Arch Culvert Plastic	Gravel	Use	filter cloth on upstream side of culverts				Dro
Round Culvert Wood	Rock Rubble		bbing or stripping of ground vegetation				Cro
Portable Bridge Concrete	Other		of ice if fill is used for Winter Crossings)				Ro
eel Stringer Bridge Ford (Engineered)		SSS IIIISI CIOIII (OII 10) V	Other:		of the above activities must be che		e within accepta
Winter Snow Pack			Olliel:	I certify that the	activities inspected are fully complian	nt based on an Signo	ature.

FOIP Report Number : FOIP database

Inspector Name:

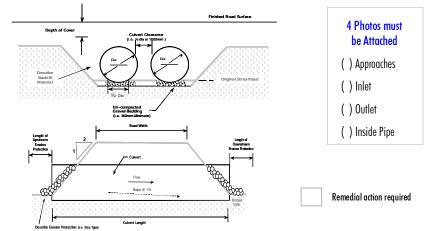

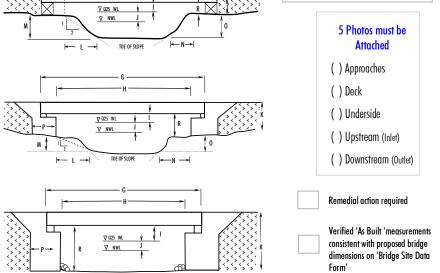

Verification :	Water Crossing Activity (X):
I have confirmed that the final crossing condition	Water crossing location same as AWS submission
satisfies the mandatory water crossing standards and	Installation of culvert and size same as described in AWS water shed calculations.
will not impede future transfer of responsibility	No sediments or woody debris left in water body or streams
Natari	Construction materials removed from site
Notes:	Embankment sloped properly (e.g. 2:1) with no possibility of slumping
	Timing restriction met
	Culvert properly installed (i.e. refer to FMP Standards)
	Sediment Control Plan in AWS followed
	No Erosion or Sedimentation present (e.g. filter cloth used to prevent material from entering waterway)
	No signs of equipment or machinery in stream (i.e. culvert installed before equipment progresses past crossing)
	Coarse clean rock used on all culvert crossings
	Natural vegetation protected
	Additional measures used to prevent erosion (e.g. seed, filter cloth, rip rap etc.)
	Drainage ditches properly installed
	Crossing removed before March 31 unless left for silviculture activities
	Road right of way width through unallocated stands , no larger than FMP requirement
	Road right of way width through AOC's (reserves), no larger than FMP requirement
Note: All of the above activities must be checked. 🗸 - Verified to be	within acceptable limits 🗶 - Outside of acceptable limits. Refer to comments for additional details N/A — Not applicable

inspection appropriate to support this decision.

Date: ___

Bridge Used (Identification #):