
Abitibi River Forest Appendix 1: Form for Submission of Information on a Proposed Crossing

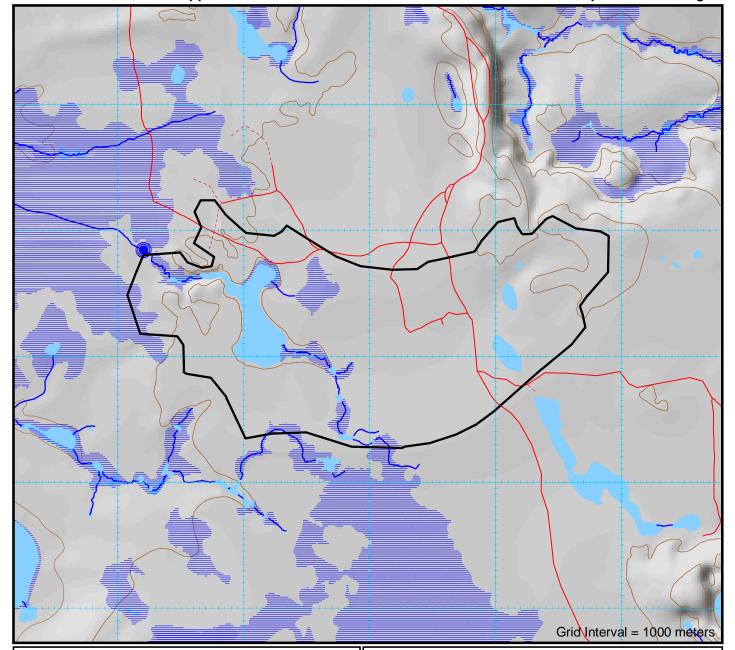

Watershed Characteristics

4.72 km² Watershed Area: 0.27 km² Lake Area: 0.00 km² Swamp Area: 0.28 km² Retention Area: 5.85 % Retention Factor: Base Class: 6.47

Watercourse Type: Permanent

Crossing Location Characteristics

Evaluation ID No.: A4490 Geographic Township: MacKlem

UTM Coordinates (NAD83): 509205E, 5370841N

Road Type: Operational

Stream Gradient: 0% Slope > 30% (17°): **NO**

Installer Experience : As Per Approved Implementation Toolkit



| Proposed Structures | | | | |
|----------------------------------|----------------|--|---------------|--|
| | Structure 1 | Structure 2 | Structure 3 | |
| Structure Type | Culvert | Portable Bridge | Ice | |
| Design Flow | Q25 | Q25 | Q2 | |
| Fill Material | Pit Run Gravel | Pit Run Gravel | Snow and Ice | |
| Dates for In Start Water Work | June 16 | June 16 | | |
| (if required) Finish | March 31 | March 31 | | |
| | >2 Years | <7 Years Coordinates and man are UTM pro | By March 31st | |

| Shaded Area for | ARFMI Road n | Previously Used 5603 | Crossing Evaluation Reference Number A4490 |
|-----------------|---------------|----------------------|---|
| Office Use Only | Network No. U | Crossing ID 3003 | Reference Number |

Publication Date: February 26, 2024

Fisheries Operational Management Zone (OMZ): Abitibi River Forest - S.F.L. # 551832

Standard for Self-assessed Water Crossing Construction, Removal and/or **Proponent:** Rockshield Engineered Wood Products

Decommissioning: Conditions of standard not met for first structure. See red text. c/o P.O. Box 867 New Liskeard, Ontario Previous Assessment Year (incl. SA): 2024

P0J 1P0 SAR species likely to be impacted: (705) 680-0033 NO Preconstruction photos available:

Plan Term: 2022-2032 NO Within 500m of Brook Trout stream: AWS Year: 2024-25

| Culvert Design Options | | Q ₂₅ | Q ₁₀ | Q_5 | Q _{2.33} |
|-------------------------------------|--|------------------------|---------------------------|--------------|--------------------------|
| | Design Flow | 3.404 m³/sec | 2.860 m ³ /sec | 2.383 m³/sec | 1.838 m³/sec |
| | 1 Round 1600mm 1500mm 1400mm 1400mm | | | | |
| 2 Round 1200mm 1200mm 1200mm | | 1000mm | | | |
| 3 Round 1200mm 1000mm 900mm | | 900mm | 800mm | | |
| | 1 Arch (BxD) 2130x1400mm 1880x1260mm 1880x1260mm 1630x11 | | 1630x1120mm | | |
| 2 Arch (BxD) 1630x1120mm | | 1630x1120mm | 1390x970mm | 1390x970mm | 1390x970mm |
| | 3 Arch (BxD) 1390x970mm 1150x820mm 1150x820mm 1150x820mm | | 1150x820mm | | |
| | • Required Opening for bridges is calculated as per the Crown Land Bridge Management Guidelines. | | | | |

Conditions on Culvert Design Options

- · Initial Fisheries Review based on one pipe. Two or more pipes requires a re-assessment.
- Round culvert calculations assume 10% fill. For 20% fill, increase diameter to next highest standard diameter.
- For 40% fill, use a round culvert diameter of the Base distance of the corresponding Arch style culvert

General Standards

- No watercourse realignment, nor use of explosives is permitted.
 Minimize loss or disturbance to riparian vegetation. Restrict removal of riparian vegetation to the disturbance footprint required for construction, maintenance and decommissioning of the water crossing.
- Install erosion and sediment control measures prior to commencement of construction or decommissioning to prevent release of sediment or other deleterious substances into watercourse.
- Fill material placed below the normal high water mark must be erosion-resistant and/or protected from erosion. • Direct storm water runoff from bridge decks, side slopes, road approaches and ditches away from the watercourse
- and into a retention pond or vegetated area.

 Ensure erosion and siltation in ditch lines adjacent to the watercourse crossing approaches are controlled using sediment traps such as rock/soil dams or log jams as site conditions warrant.

 Do not block or impede the free passage of water and fish at any time of year up and down stream,
- with the exception of potential and temporary blockage due to water crossing construction/decommissioning activities.
- Abide by fisheries in-water timing windows in the approved FMP and/or forest management guides. Where fishery communities are not well documented, the most restrictive in-water timing window must be used. • Complete all in-water construction and decommissioning activities in an uninterrupted fashion and in an appropriate
- timeframe to minimize potential for site disturbance.

 If installation requires inwater work, do not locate within 100m of spawning or sensitive fish habitat eg. rapids, riffles, known overwintering areas.
- Maintain machinery free of fluid and fuel leaks. Wash, refuel and service machinery at least 30m from watercourse. Store fuel and other materials for machinery a minimum of 30m from the watercourse.
- · Operate machinery on land with tracks/wheels above the normal high water mark, or on ice in a manner that avoids disturbance to the banks of the watercourse and adjacent riparian vegetation areas. Remove all debris from construction and decommissioning work from the site following completion of the undertaking.
- If machinery fording is required, limit to a one-time event (over and back) per piece of equipment essential to
- implementating the project, and only if using an existing crossing at another location is not available or practical.

 If minor rutting is likely, watercourse bank and bed protection methods (e.g., swamp mats, pads) are to
- be used provided they do not constrict flows or block fish passage;
- Grading of the watercourse banks for the approaches is not permitted;
- If the watercourse bed and banks are steep and highly erodible (e.g., dominated by organic materials and silts) and erosion or degradation is likely, use a temporary crossing structure or other practice to protect them;
- The one-time fording must adhere to the appropriate in-water timing windows; Fording must occur under low-flow conditions and not when flows are elevated due to local rain events or seasonal flooding.

- · All calculations are for projecting ends. Total pipe length normally not to exceed 20m.
- All calculations assume a Headwater Depth of 1.0.
- MP = Multi-Plate (i.e. SPCSP)

Standards for Single, Small Closed-Bottom Round Culverts

- This standard applies to single, round, corrugated, closed-bottom steel, aluminum, or plastic culverts less than or equal to 1200mm in diameter that do not require site-specific engineering approval per MNRF's Crown Land Bridge Manual.
- This standard only applies if the project does not:
- Replace an existing open-bottom crossing (e.g., clear span bridge, arch culvert);
- Replace an existing closed-bottom culvert larger in diameter than that being installed; or - Involve the installation of more than one closed-bottom culvert at the crossing location.
- Locate, design and construct to minimize likelihood of ongoing outlet scour, culvert undermining or erosion of fill in order to provide stable, non-perched culverts that provide for fish passage
- Do not locate on meander bends, braided streams, or any other area inherently unstable that may result in alteration
- of natural stream functions or erosion and scouring of the structure. Size to a minimum Q25 design flow. If an unmapped stream is encountered and proper analysis cannot be
- completed to determine Q25, size to ensure it spans from bank to bank.
- Do not install where channel slope at crossing location is of a gradient greater than 2.0%.
- Do not install where slope of road approaches or either bank approach is greater than 30% (17°).
- · Locate where culvert can be embedded below grade of stream bed.
- · Use site-specific mitigation measures to ensure no ongoing erosion of fill. As a minimum:
- Stabilize both inlet and outlet ends with appropriately sized non-erodible material;
- Rock used is clean, free of fine materials and of sufficient size to resist peak flood events;
- Place rock at original bank grade to ensure no infilling or narrowing of watercourse;
- Fill material placed below normal high water mark must be erosion resistant and/or protected from erosion. The Forest Management Guide for Conserving Biodiversity at the Stand and Site Scales refers to the normal high-water
- mark as the edge of vegetation communities capable of providing an effective barrier to the movement of sediment.

 Do not locate within 100 metres of fisheries spawning or sensitive habitat.
- Do not locate within 500 metres of any brook trout spawning or upwelling greas.
- Do not locate on watercourses that flow into, and are within 500m of, known naturally reproducing brook trout lakes. • Mix of size, length, slope & drainage area must not increase flows to consistently & predictably impede fish passage.
- Install under low-flow conditions and not when flows are elevated due to local rain events or seasonal flooding.
- Both interior and exterior of culverts must be corrugated to ensure structural stability and facilitate fish passage
- The grade of the culvert must reflect the grade of the natural watercourse bed.
- Compact backfill adequately around the culvert. Use only dean sand or gravel and compact around the culvert in layers.
- Length of culverts must permit banks to be sloped at an angle of 2:1 or a stable angle of repose for the materials used.

Reviewed by MNRF. Follow standard(s) as well as any Appendix 2 conditions.

MNRF Appendix 2: Biologist Risk Evaluation

Concerns and Conditions on Construction

Watershed Thermal Code: CL

MNRF Assigned Thermal Code at Crossing


| | Structure 1 | Structure 2 | Structure 3 |
|---------------------------|-------------|-------------|-------------|
| Risk Evaluation: | LOW | LOW | LOW |
| Site Inspection Required: | NO | NO | NO |


| A DUMINI DIAME |
|--|
| ABITIBI RIVER Forest Management Inc |

| DRFMI (rnssi | ng Installation I | Renort | | Only certifie | ed inspectors are allowed to condu | ct Forest Operations Inspe | ctions for subm |
|---|---|---|--|--------------------|---|----------------------------------|------------------|
| TIBI RIVER Management Inc | ng marananan | (Must be com | ppleted for each crossing location) | | * 'As Built' Culvert I | nstallation Measuren (meters) | nents |
| Shareholder: | | Block ID: | | · | Installed Diameter : | | |
| Contractor: | | Pood Name | | Æ | Structure Length : | | |
| | | Road Name: | | CULVERT | Road Width : | | |
| TE CONDITIONS ENCOUNTER | RED | | | O | Depth of Cover: | | |
| ossing Located By: | | Date Measurements Taken: | | | Water Depth in Pipe : | | |
| | | | | | Number of Culverts : | | |
| Stream Measurements | | | Foundation Soil Description : | | Spacing Between Pipes : | | |
| (meters) | | * | Sand Muck | | | | |
| Flood Plain Width : A | | ** | Silt Rubble | | * 'As Ruilt' Bridge I | nstallation Measuren | ments |
| Bankful Width : B | | A | Clay Gravel | | | (meters) | |
| Channel width : C | F E | ¥ | Channel Type: | | Bridge length : | G | |
| Depth - 25% of Channel : D (1) | D (I) | 1 1) D(c) D(r) | Ephemeral Ephemeral | | Clear Opening Width : | Н | |
| Depth - 50% of Channel : D (c) | Notes: | | Intermittent | | Freeboard (min 0.5m) : | I | |
| lepth - 75% of Channel : D (r) | | | Permanent | 90 | Flood Rise : | J | |
| Depth - Bankful Flow : E | | | ADENI Nacifratian Daniel J | BRIDGE | Fill Height : | K | |
| Depth — Floodplain : F | | | ARFMI Notification Provided : (ARFMI Advised - 'Change to Operation' made) | • | Left Slope Length : | L | |
| Stream Velocity : m /sec | | | FRI Incorrect | | Left Slope Rise : | M | |
| | | | Unmapped | | Right Slope Length : | N | |
| | | | | | Right Slope Rise : | 0 | |
| STALLATION CONDITIONS | | | | | Crib Width : | P | |
| tallation Supervised By: | | Date of installation: | | | Crib Height : | R | |
| | | | | | | | |
| ossing Permanency :Refer to Structure Removal Timeframe spe | cified in AWS 4 and 5 | | Exercise Description and Control (V) | Verifia | ation: I have confirmed that the final a | rossing condition | Water Cr Wa |
| Permanent Temporary Decomp | nissioned Date: | | Erosion Prevention and Control (X): (Indicate applicable measures taken) | | satisfies the mandatory water cro will not impede future transfer of | ssing standards and | lns |
| te: Measurements (*) must be included for all | Removal Date: | Stable slopes on s | stream banks and drainage ditch banks | Note | · | | 7 🔲 Co |
| octores which remain in place beyond dure of inspection | al Crossing Location on Stream Segment): | - | Course, clean rock to high water mark | Note: | u . | | En |
| | al Crossing Location on Stream Segment): | Re-vegetate or seed | slopes (stream banks and ditch banks) | | | | Cu Se |
| Bridge Record Form submitted (i.e. MNR /ARFMI) | N | | Divert drainage ditches to green belt | | | | No |
| New Crossing Type: Structure Description | | _ | Line drainage ditches with rock | | | | No |
| Box Culvert Steel | Sand | Use rock weirs in | drainage ditches to impede water flow | | | | No Ad |
| Arch Culvert Plastic | Gravel | Use | filter cloth on upstream side of culverts | | | | Dro |
| Round Culvert Wood | Rock Rubble | | bbing or stripping of ground vegetation | | | | Cro |
| Portable Bridge Concrete | Other | | of ice if fill is used for Winter Crossings) | | | | Ro |
| eel Stringer Bridge Ford (Engineered) | | SSS IIIISI CIOIII (OII 10) V | Other: | | of the above activities must be che | | e within accepta |
| Winter Snow Pack | | | Olliel: | I certify that the | activities inspected are fully complian | nt based on an Signo | ature. |

FOIP Report Number : FOIP database

Inspector Name:

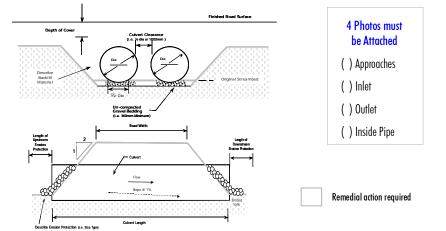

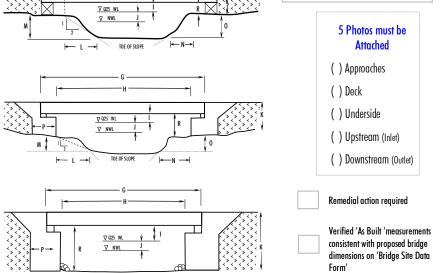

| Verification : | Water Crossing Activity (X): |
|---|--|
| I have confirmed that the final crossing condition | Water crossing location same as AWS submission |
| satisfies the mandatory water crossing standards and | Installation of culvert and size same as described in AWS water shed calculations. |
| will not impede future transfer of responsibility | No sediments or woody debris left in water body or streams |
| Natari | Construction materials removed from site |
| Notes: | Embankment sloped properly (e.g. 2:1) with no possibility of slumping |
| | Timing restriction met |
| | Culvert properly installed (i.e. refer to FMP Standards) |
| | Sediment Control Plan in AWS followed |
| | No Erosion or Sedimentation present (e.g. filter cloth used to prevent material from entering waterway) |
| | No signs of equipment or machinery in stream (i.e. culvert installed before equipment progresses past crossing) |
| | Coarse clean rock used on all culvert crossings |
| | Natural vegetation protected |
| | Additional measures used to prevent erosion (e.g. seed, filter cloth, rip rap etc.) |
| | Drainage ditches properly installed |
| | Crossing removed before March 31 unless left for silviculture activities |
| | Road right of way width through unallocated stands , no larger than FMP requirement |
| | Road right of way width through AOC's (reserves), no larger than FMP requirement |
| Note: All of the above activities must be checked. 🗸 - Verified to be | within acceptable limits 🗶 - Outside of acceptable limits. Refer to comments for additional details N/A — Not applicable |

inspection appropriate to support this decision.

Date: ___

Bridge Used (Identification #):